



GEZE TS 3000 V
OVERHEAD DOOR CLOSERS WITH GUIDE RAIL

GEZE TS 3000 V

Guide rail door closer for 1-leaf doors up to 1100 mm leaf width

The overhead door closer TS 3000 V is approved for 1-leaf right and left single-action doors up to 1100 mm and for installation on smoke and fire protection doors. The closing force, size 1-4 acc. to EN 1154, can be adjusted at the side, the hydraulic latching action and thermally stabilised closing speed can be adjusted from the front.


Special versions

- TS 3000 V with mechanical hold-open device with variable adjustment between 80° and 130° (not permissible on smoke and fire protection doors)
- TS 3000 V BC with back check adjustable from the front

GEZE TS 3000 V



GEZE TS 3000 V

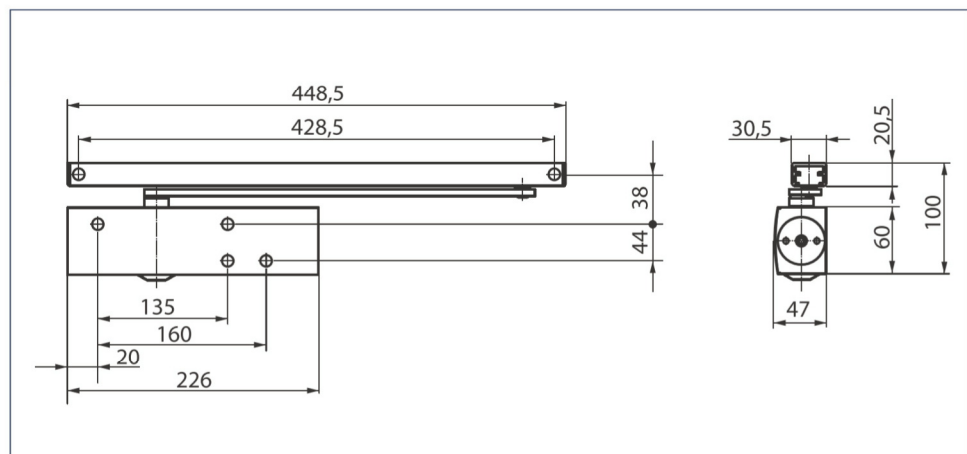

Application range

- For single-action doors, leaf width up to 1100 mm
- Can be used for doors mounted on the right or left without conversion
- For fire protection doors (door closer with mounting plate)

Closer technical data

Product features	GEZE TS 3000 V closer	GEZE TS 3000 V BC closer	GEZE TS 3000 EN3 closer
Closing force in accordance with EN 1154	1 - 4	1 - 4	3
Recommended leaf width up to	1100 mm	1100 mm	950 mm
Same version for left and right-hand doors	●	●	●
Product tested in accordance with	Door closer tested in accordance with EN 1154		
Fire protection door suitability	●	●	●
Mounting plate with hole pattern in accordance with EN1154 supplement	●	●	●
Length	226 mm		
Overall depth	46 mm		
Height	60 mm		
Functions			
Adjustable closing force	Yes, stepless	Yes, stepless	No
Adjustable closing speed	●	●	●
Adjustable latching action	Yes, via valve		
Integrated back check	No	Yes, hydraulically adjustable	No
Position of closing force adjustment	At the side	At the side	
Safety valve against wilful damage	●	●	●
Thermo-control valves	●	●	●

- = YES
- = OPTIONAL

Guide rail technical data

Product features	Guide rail TS 5000/ TS 3000 vertically adjustable	Guide rail TS 5000/ TS 3000	T-Stop guide rail TS 5000/TS 3000
Length	448.5 mm	448.5 mm	452.5 mm
Overall depth	30.5 mm	30.5 mm	33 mm
Height	20.5 mm	20.5 mm	30 mm
Functions			
Integrated opening restrictor	○	○	●
Integrated hold-open device	○	○	○
Height correction possible	●	-	-

- = YES
- = OPTIONAL